




KuSaBa Engineers Pvt. Ltd.

EZ-COMPASS-DIVE / MAGNETOMETER
Submersible Tilt Compensated Compass / Linear Dual Axis Tilt System

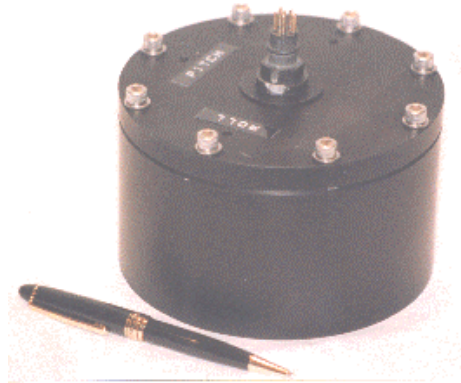

High reliability submersible advanced pitch/roll compensated COMPASS / MAGNETOMETER system is built around a state of the art CMOS micro controller utilizing AOSI's proprietary algorithm on a 2.5" x 2.5" or 2" x 2.5" assembled PCB with a total height including tilt sensing elements of less than an inch.

Packaged in a marine grade black anodized cylindrical aluminum housing the unit outputs continuous heading, field, dual axis tilt and temperature data over the standard RS-232 interface at depth up to 3500 meters. The AZIMUTH is generated from a 3-axis semiconductor magnetometer with **12 Bit (0.08 deg) resolution**. The LINEAR tilt information is available with 12 Bit resolution and includes flash adjustable gain for up to ± 70 arcdeg.

COMPASS/TILT module is perfectly suitable for numerous underwater navigation, research, training, construction, entertainment and other precision orientation, navigation and leveling applications. Bottom exterior surface is calibrated for accurate zero level

The COMPASS is able to output heading information in NMEA-0183 and local LCD modes. Easy link via Hyper Terminal Windows accessory facilitates custom calibration, hard/soft iron compensation, data acquisition, data averaging, and data display. For applications requiring custom tilt range, the compass can be supplied with any AOSI's single axis tilt sensors.

Parameter	Specification	Units/description
Azimuth Range	0—360	deg, continuous
Azimuth Resolution	12 (0.08)	bit (deg)
Azimuth Repeatability	< 0.25	deg, typical
Azimuth Accuracy	< 1	deg, typical
Magnetic Field	+2	Gauss typical
Magnetic Resolution	< 1	mGauss typical
Pitch Range	+70 to -70	arcdeg linear
Roll Range	+70 to -70	arcdeg linear
Pitch Range	+80 to -80	arcdeg near-linear
Roll Range	+80 to -80	arcdeg near-linear
Tilt Resolution	12	bit full scale, both axis
Tilt Repeatability	<2;	Bits
Operational depth	3500	Meters
Temperature	-40 to +80	deg C
Storage Temp.	-50 to +95	deg C
Communication	300--38400 baud, 8,N, 1	RS-232 standard
Supply	8 to 18	Vdc, 12Vdc typical
Size	2.5"L x 2.5"W x 1.0"H	PCB Board
NMEA-0183 mode	5 sentences	must use CR LF

26, Amar Society, Gulmohar Path, Off Law College Road, Erandawane, Pune – 411 004,
PHONE: +91 -20 – 2546 4818, 2543 3879,2543 1293, FAX: +91 – 20 25446759.
Email: info@kusabaengrs.com, WEB – www.kusabaengrs.com